

TI technology enables Truescore's taekwondo electronic scoring system



Company:

Truescore Inc.

Challenge:

Taekwondo, a martial arts sport and Olympic event, is traditionally scored by judges. To award a point, judges must determine not just if a blow was landed, but if it had sufficient impact. The game's blazing speed makes this highly subjective. Truescore Inc. decided to improve that with an electronic sensing and scoring system.

Solution:

Using data from an innovative multi-sensor system embedded in a protective vest, Truescore's sophisticated algorithms are executed by Texas Instruments (TI) ultra-low-power MSP430™ 16-bit microcontrollers that also handle baseband processing, creating a highly reliable system that is more accurate than human judges. Truescore's system also includes TI's CC2520 ZigBee® IEEE 802.15.4 RF transceiver, which provides a robust radio frequency (RF) link despite interferences in the 2.4-GHz band, which are resolved with frequency agility.

Customer benefit:

The electronic system is more accurate than human judges and eliminates the subjectivity that creates contention. Truescore's third-generation product also attenuates the RF interference common in competition venues. Using TI's chips, evaluation kits and technical support, Truescore had a working prototype in less than two months.

"TI has been very instrumental in helping us to move quickly without having to spend months on a learning curve. When we had to evaluate some feature or design concept, they were right there. I've worked with TI for 10 years and technical support has always been phenomenal. In the beginning, when I first proposed my application, they did not ask questions like 'what's your volume?' Instead, I had the kind of response I would normally expect from a small company that really wants to win your business,"

—Jin Song, Truescore CEO


The challenge

When Truescore ramped up to design an electronic judging system for the sport of Taekwondo – in which contestants score points by landing foot or fist blows to an opponent's torso or head – the design team was presented with an impressive portfolio of unusual and unique engineering challenges. The impact from a legal strike must be substantial, for example, so points are not awarded for glancing blows, partially blocked kicks, head butts, or elbow contact. The electronic system had to be fast, without compromising the agility of the competitors. It also had to be accurate, lightweight, inexpensive and battery efficient – the battery must last for at least 20 hours of continuous use before a recharge.

The application

Truescore saw a few different opportunities to build from. Contestants are required to wear a protective vest, called a hogu, along with headgear, gloves and footgear, all of which could accommodate an ultra-compact system of sensors, radio, batteries and a microcontroller. Although action is lightning fast (potentially four kicks per second and



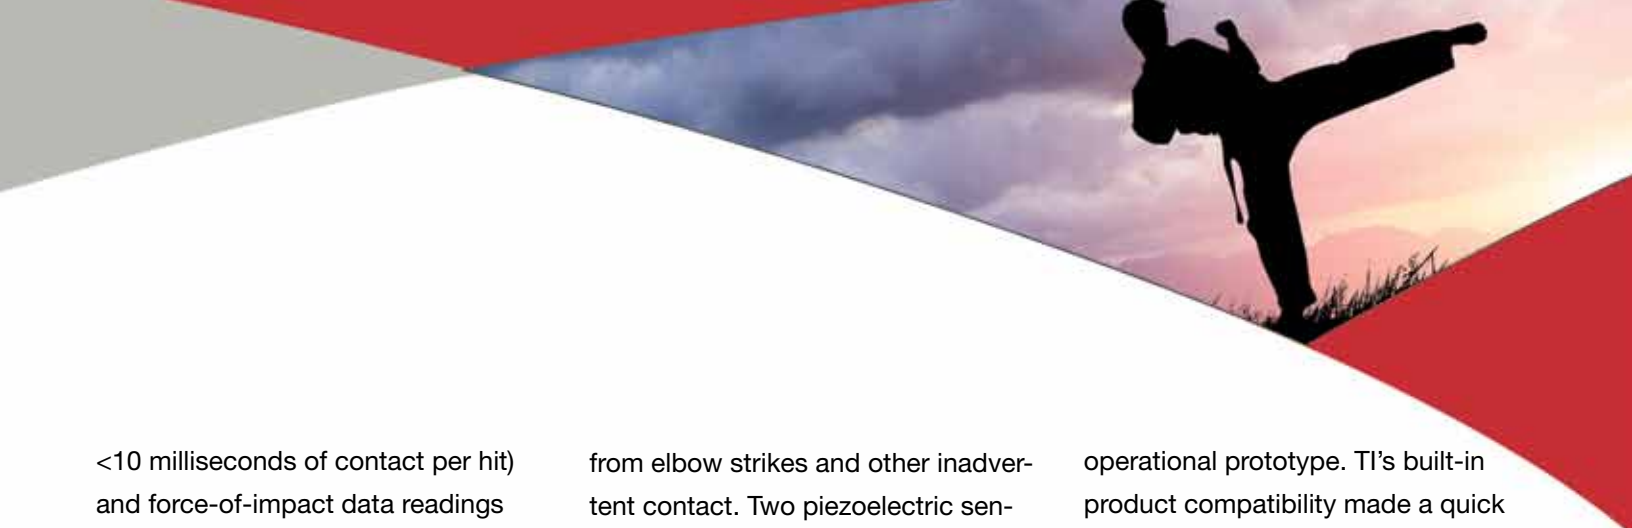

<10 milliseconds of contact per hit) and force-of-impact data readings must be precise and unambiguous, Truescore's design team had a technology arsenal equal to the task, including high-performance microcontrollers, a lightweight protocol and sophisticated sensors. Competitive venues can be difficult RF environments, but Truescore uncovered an effective solution for avoiding interference in the crowded 2.4-GHz band.

The solution

Truescore's core-sensing technology is a combination of a piezoelectric sensors and inductive proximity sensors in the hogu and a strong magnet in the footgear. As a competitor is about to strike another, inductive sensors sense the approaching magnet and open a time window for a valid strike. This eliminates false readings

from elbow strikes and other inadvertent contact. Two piezoelectric sensor systems simultaneously log the impact so an average can be used to more accurately calculate the force of the blow. TI's MSP430F5xx series of microcontrollers serve double duty by executing the sophisticated algorithm and handling a customized wireless protocol.

OEM customer benefits

"From the power amplifier to the CC2520 transceiver, MSP430 microcontroller and C2591 radio front-end amplifier, virtually our entire components list is sourced by TI parts," says Truescore CEO, Jin Song. "Being able to quickly integrate the hardware into a system was critical for the company's third-generation E-Hogu product because the design team had just 1.5 months to develop a fully

operational prototype. TI's built-in product compatibility made a quick design turnaround possible."

The biggest, new engineering challenges for the third-generation product was to avoid RF interference in the 2.4-GHz ISM band in addition to the lack of time available for development. Since the first-generation product in 2002, venues where competitions are held have become increasingly noisy from Wi-Fi-enabled laptops, mobile phones and other connected devices. Truescore opted to attack the interference problem by implementing frequency agility. TI's technical support proved invaluable. "We had no time to re-design in case of miscalculation, and the system worked the first time," says Song, "which is practically unheard of in my 20 years."

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

MSP430 is a trademark of Texas Instruments. All other trademarks are the property of their respective owners.

SLAT136

© 2012 Texas Instruments Incorporated



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated